



Project series


VQ8LX三分频防水线性阵列系统




技术规范说明 *Owner's Manual*

VQ8LX.....	1
W218A.....	2
系统图.....	3

产品结构:

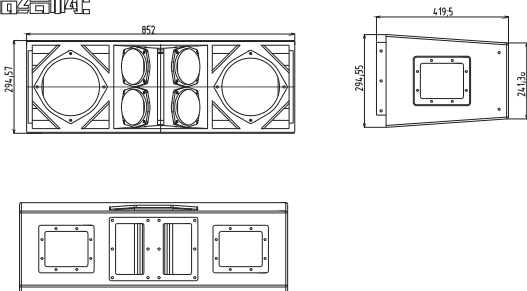

应用组合:

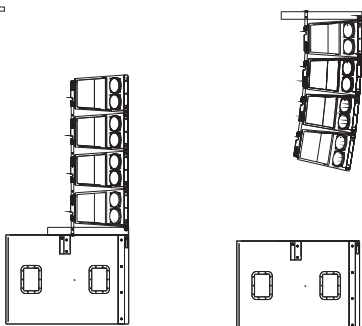

产品特性:

- ◇三频线防水阵列系统
- ◇系统采用多项专利及驱动技术以及VQ8LX定制的各种高性能安装组件, 为全球的各种固定场所和流动演出提供了完善的解决方案
- ◇专业悬挂系统, 安全、快速、可靠
- ◇紧凑的箱体获得线性平滑高能量的输出

箱体构造:

- ◇箱体材料为18MM桦木板, 坚固耐用
- ◇箱体表面喷黑色金刚砂漆, 防水耐磨

应用范围:

- ◇户外演出、体育馆扩声、剧院扩声
- ◇会所、多功能厅和演艺厅扩声、礼堂扩声
- ◇高素质的中型固定安装及流动演出专业音响系统

FEATURES:

Tri-amp line array system
Highest output to size ratio
Integrated rigging system for flown & sound stackable
Water-proof

APPLICATIONS:

High demands applications
Touring,outdoor event,
Large format venue usage

型号MODEL	VQ8LX 三频线性阵列演出系统
单元Speaker Unit	
Low :	2x 8in, 600W, 8 ohm
Mid :	4x 4.5in, 400W, 8 ohm
High:	2x 1.75in, 100W, 8 ohm
频响Frequency Response	60HZ-18KHZ(±3dB)
灵敏度System Sensitivity	
Low 1W/ 1m:	98 dB
Mid 1W/ 1m:	103 dB
High 1W/ 1m:	102 dB
最大声压(Maximum SPL)	
Low:	128 dB
Mid:	133 dB
High:	131 dB
建议最低/最高频率LPF/HPF	LF-LPF: 207Hz,HPF:80Hz MF-LPF: 1.59KHz,HPF:207Hz HF-LPF: 19KHz,HPF:1.59KHz
覆盖角度Nominal Dispersion:	Horizontal:90°Depending on splay , Max,Vertical splay:3°
分频Crossover point:	通过外置处理器 By external processor
插座Socket	2×Customized waterproof socket NL8
悬挂系统Rigging system:	0°,3°,6°,9°,12° with front splay extend to 18°
尺寸Dimensions(宽W×深D×高H):	852 x 419.5x 294.55mm
重量Weight(公斤.kg)	45 kg
系统配套超低音箱	W218A
System Supporting of Subwoofer:	

产品特性:

- ◇高效能少干涉输出
- ◇辐射范围宽、远
- ◇专业吊挂件装配, 安全、快速、可靠
- ◇人性化的安装, 可靠性的防水耐热材料

箱体构造:

- ◇箱体材料为多层胶合板
- ◇环保水性弹性油漆
- ◇倒相式箱体结构

应用范围:

- ◇现场演出
- ◇音乐播放
- ◇语言

FEATURES:


High performance and low interference output
Wide dispersion range
Integrated rigging system for flown & sound stackable

BOX CONSTRUCTION:

Plywood & environmental water resistant
Black texture paint

APPLICATIONS:

Live show
Music play

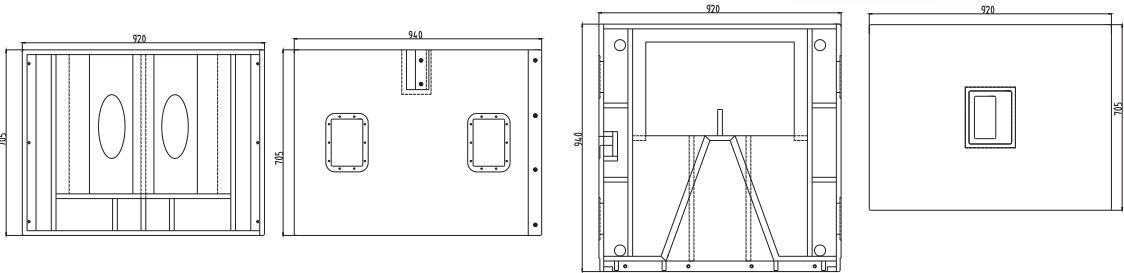

Front	Side	Top	Back
型号Model		W218A	
系统System:		超低频音箱Sub bass band-pass enclosure	
额定功率Power handling:		2x 18in, 1600W, 4 ohm	
频率响应Frequency response:		30Hz~150Hz (±3dB)	
灵敏度Sensitivity-1w/ 1m:		102 dB	
声压级Max. SPL peak:		138 dB	
角度Dispersions:		Omni	
分频点Crossover point:		90Hz	
插座Input connectors:		2x NL4 speakon	
箱体形状Enclosure shape:		Rectangular	
箱体材料Enclosure material:		13-ply 18mm birch wood	
油漆Finish:		防水油性漆 Wear resistant texture paint	
铁网Grille:		多孔铁网+防水棉 Powder coated perforated steel with front foam	
尺寸Dimensions:		920 x 940 x 705mm	
重量Net weight:		85 kg	





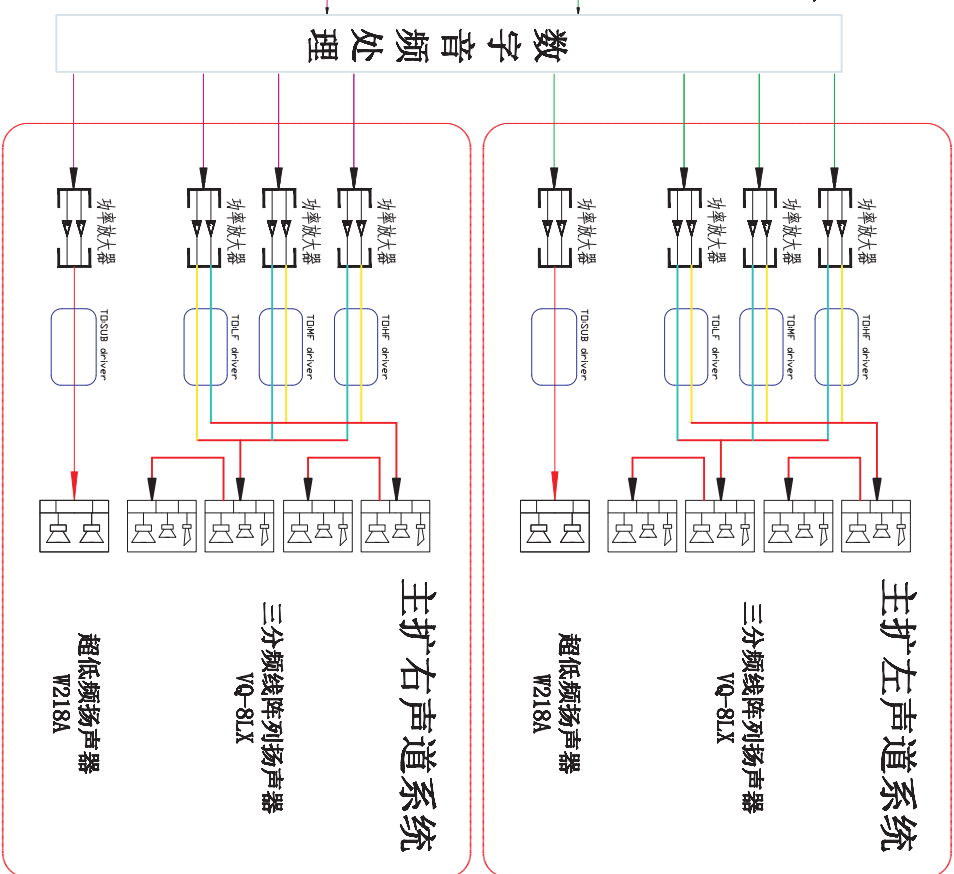


图 例

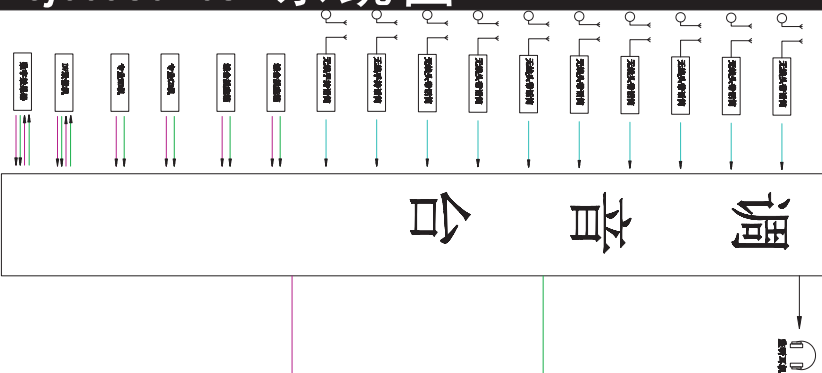



演艺科技，尽在剧院之声

● 因产品不断改进，指标不必通知就可以改变。